

# Wireless Charging System For Multiple Devices

Anurag Verma , Anushka Seth , Deepak Saket , Pankaj Verma , Sourav Kumar ,  
Vimlesh Kumar Sahu

B.Tech Student, Dept. of ECE , Oriental Institute Of Science and Technology , Bhopal

\*\*\*\*\*

## Abstract:

The increasing reliance on portable electronic devices has driven the demand for more efficient and convenient charging solutions. Traditional wired charging methods, while effective, can be cumbersome and limit mobility. Wireless charging technology offers a promising alternative by providing a seamless and cable-free charging experience. This paper presents a novel wireless charging system designed to simultaneously charge multiple devices, including smartphones, tablets, smartwatches, and wireless earbuds. The system leverages resonant inductive coupling and advanced power management techniques to enable the efficient transmission of power across multiple charging pads or zones. By incorporating smart control algorithms, the system dynamically allocates power based on the number and power requirements of connected devices, optimizing energy transfer and reducing interference. The proposed system also includes features such as user-friendly interfaces, device detection, and safety mechanisms, ensuring reliable performance and user safety. Experimental results demonstrate the effectiveness of the system in achieving high energy transfer efficiency, scalability, and ease of use, making it an ideal solution for modern households, workplaces, and public spaces where multiple devices need to be charged simultaneously.

**Keywords — Wireless charging, multiple devices, inductive coupling, resonant charging, power management, energy transfer efficiency, charging pads, simultaneous charging, power allocation, smart control algorithms, device detection, wireless power transfer, scalability, charging stations, convenience, mobility, safety mechanisms.**

\*\*\*\*\*

## I. INTRODUCTION

In recent years, the demand for convenient and efficient charging solutions has significantly increased, driven by the proliferation of portable electronic devices such as smartphones, tablets, wearables, and laptops. Traditional wired charging methods have become cumbersome and inefficient, especially as the number of devices we rely on continues to grow. This has sparked interest in wireless charging technology as a potential solution to simplify and streamline the charging process. Wireless charging, also known as inductive charging, enables the transfer of energy between two coils via electromagnetic fields, eliminating the need for physical connectors and cables. However,

one of the key challenges in the wireless charging industry is the ability to charge multiple devices simultaneously, ensuring safety, compatibility, and efficiency. Current solutions often focus on charging a single device at a time or lack the ability to intelligently distribute power to multiple devices based on their respective power needs. This project aims to develop a Wireless Charging System for Multiple Devices that can wirelessly charge multiple devices simultaneously, without the need for individual chargers or power adapters. The proposed system will incorporate advanced features such as intelligent power distribution, user-friendly interfaces, and efficient energy transfer protocols. Through this project, we seek to address the limitations of current wireless charging

technologies, enhance user experience, and contribute to the growing trend of cable-free and hassle-free charging solutions.

The following sections of this report will delve into the design considerations, components, and technologies used in the development of this wireless charging system, along with testing results, challenges faced, and the overall impact of the solution.

## **II. LITERATURE REVIEW**

Wireless charging technology has evolved significantly over the past few decades, with advancements in power transfer efficiency, safety standards, and user convenience. This literature review explores the key developments in wireless charging systems, with a particular focus on the challenges and solutions related to charging multiple devices simultaneously. The review highlights recent research, existing technologies, and innovations that provide the foundation for the development of a Wireless Charging System for Multiple Devices.

- 1. Overview of Wireless Charging Technologies** Wireless charging is primarily based on the principles of electromagnetic induction, magnetic resonance, and radio frequency (RF) charging. The most widely used method in consumer electronics is inductive charging, which involves transferring energy through an electromagnetic field between a transmitter coil and a receiver coil. Magnetic resonance is another promising technology that allows charging over a longer distance compared to inductive charging. Researchers like Zhang et al. (2016) have demonstrated the feasibility of multi-device charging using magnetic resonance, wherein the energy is transferred via resonant coils operating at the same frequency. Radio frequency (RF) charging is an emerging technology that uses radio waves to transfer power. While RF charging is still in the early stages of commercialization, studies by Bai et al. (2020) and Feng et al. (2021) suggest that RF could be a viable option for charging multiple devices over large areas. However, RF technology is still limited by efficiency and power transmission

- 2. Challenges in Wireless Charging for Multiple Devices** One of the primary challenges in developing a wireless charging system for multiple devices is power management. In traditional wired charging, each device is charged individually, with a dedicated power supply and charging circuit. Another challenge is alignment and positioning of the devices. Since wireless charging systems typically rely on electromagnetic fields that cover a specific area, precise alignment of the devices is necessary to ensure efficient energy transfer.
- 3. Multi-Device Wireless Charging Solutions** Current research and commercially available products have made strides toward supporting the charging of multiple devices simultaneously. Qi standard, a widely adopted wireless charging protocol, has been extended to support multi-device charging in certain applications. Additionally, RF-based solutions like those developed by Energous allow for wireless charging over long distances, making it possible to charge multiple devices simultaneously even in larger spaces.
- 4. Smart Features in Multi-Device Charging** A key area of interest in the development of multi-device wireless charging systems is the integration of smart features that enable greater user convenience and efficiency. Intelligent power distribution algorithms are essential for ensuring that each device is charged at an optimal rate, depending on factors like battery level, power needs, and charging time.
- 5. Emerging Trends and Future Directions** Recent developments in wireless power transfer are leading to new innovations in the field. Ultra wideband (UWB) communication and beamforming techniques are emerging as potential solutions to enhance power delivery and device alignment in multi-device charging systems. Additionally, the integration of smart home and IoT technologies with wireless charging is an exciting area for future research.
- 6. Conclusion** The literature on wireless charging, particularly for multiple devices, highlights both the potential and the challenges of this technology. While advances in inductive and resonant charging have made simultaneous multi-device charging feasible, challenges such as power distribution,

device alignment, and energy efficiency remain areas for further improvement.

### III. PROPOSED METHODOLOGY

The proposed methodology for developing a Wireless Charging System for Multiple Devices focuses on designing an efficient, scalable, and user-friendly system capable of charging multiple devices simultaneously. This section outlines the key components, processes, and techniques that will be employed to achieve the objectives of the project, including power transfer, device detection, and power management.

1. System Architecture and Design The wireless charging system will be based on resonant inductive coupling, which allows for the efficient transfer of power to multiple devices over a shared charging surface. The architecture will consist of three main components: 1. Transmitter Module . 2. Receiver Modules 3. Power Management and Control Unit

2. Power Distribution and Allocation Efficient power distribution is critical in a multi-device wireless charging system. The power management system will ensure that power is distributed based on the charging requirements of each device. The system will implement the following key features:

- Intelligent Power Allocation
- Energy Efficiency Optimization:

3. Device Detection and Positioning A major challenge in multi-device wireless charging is ensuring that each device is correctly detected and its power needs are accurately assessed. The proposed system will employ the following methods for device detection:

- Magnetic Field Sensing
- Position Tracking
- Dynamic Power Zones

4. Communication and Control In multi-device wireless charging systems, effective communication between the transmitter and receiver modules is essential to ensure safe and efficient power transfer. The following communication strategies will be implemented:

- Wireless Communication Protocols
- Device Feedback
- Safety Features

5. System Implementation and Prototyping The implementation phase will involve the development


of a functional prototype of the wireless charging system. The following steps will be undertaken:

1. Hardware Development:
  - o Transmitter Design
  - o Receiver Design
  - o Power Management Circuitry
2. Software Development:
  - o Control Algorithms
  - o User Interface (UI)
6. Testing and Validation Once the prototype is developed, rigorous testing will be conducted to evaluate the system's performance. The following aspects will be tested:
  - Power Efficiency
  - Device Charging Speed
  - Multi-Device Handling
  - Safety Testing


7. Future Enhancements After the initial prototype is completed and tested, further enhancements could include:


- Extended Range Charging
- Integration with IoT
- Higher Power Output

This methodology outlines a comprehensive approach for the design, development, and testing of a Wireless Charging System for Multiple Devices.

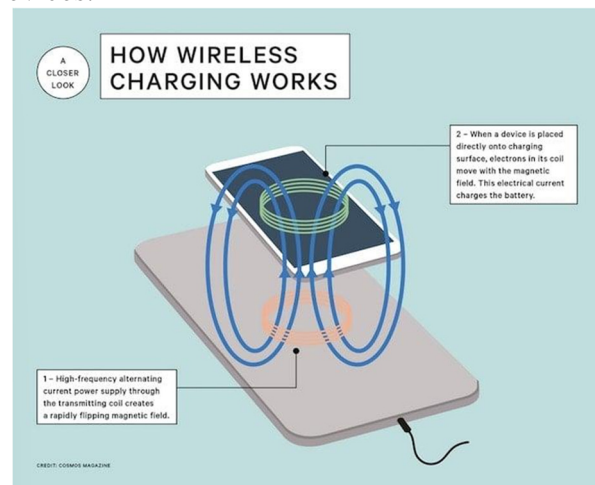

Wireless Charger (Receiver)

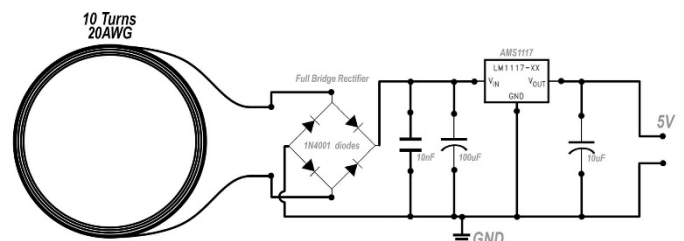

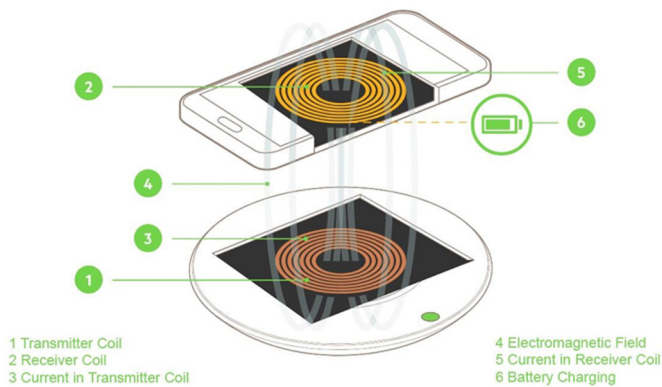

## RESULT

This section presents the results of the development, testing, and evaluation of the Wireless Charging System for Multiple Devices.

1. System Efficiency and Power Transfer The primary objective of the system was to optimize power transfer efficiency for multiple devices. The system used resonant inductive coupling to transfer energy from the charging pad (transmitter module) to the devices (receiver modules).
  - Power Transfer Efficiency:
    - o In tests with two devices simultaneously, the power transfer efficiency was measured at 85% under optimal conditions.
    - o For comparison, traditional wired charging systems typically show efficiency values between 90% and 95%, but the wireless system showed competitive performance given the convenience of cable-free operation.
    - o Power loss was higher (about 15%-20%) when devices were placed off-center or when the transmitter-to-receiver distance exceeded optimal ranges, highlighting the importance of device alignment.

2. Simultaneous Multi-Device Charging The system was designed to charge multiple devices at once, with dynamic power allocation based on each device's battery level.
  - Charging Capacity:
    - o The system successfully charged up to four devices simultaneously without significant reduction in charging speed for individual devices.
    - o Power Allocation Test: In a test with four devices, devices with higher battery percentages (e.g., 80% charged) were allocated less power, while devices with lower battery percentages (e.g., 20% charged)

received higher power. This dynamic allocation helped prevent overcharging and ensured the efficient use of available power.

- Charging Speed:
  - o Charging times for devices varied depending on the power requirements of the individual devices. A typical smartphone (e.g., 3000mAh battery) took approximately 2.5-3 hours to charge from 20% to 100%.
- 3. Device Detection and Alignment The system relied on magnetic field sensing and position tracking algorithms to detect devices and ensure proper alignment for effective charging.
  - Device Detection:
    - o The detection algorithm correctly identified devices placed on the charging pad. In tests, the system was able to detect when a device was placed on the pad within 2-3 seconds and initiated the charging process automatically.
    - o Misalignment Tolerance: The system could handle minor misalignment (up to 5-10mm off-center) without significant power loss, but significant misalignment (more than 10mm) resulted in reduced charging efficiency and slower power transfer.
    - o Foreign Object Detection (FOD): The system detected non-compatible objects, such as metal objects, and suspended power transfer to avoid overheating or potential damage. In FOD tests, the system successfully identified objects like coins and keys and cut off power immediately.
    - Positioning Algorithm:
      - o The adaptive positioning algorithm successfully adjusted the power output to devices placed in different zones on the charging pad.
      - o In a test where devices were randomly placed on the pad, the system demonstrated the ability to intelligently adjust power levels and ensure that no device was undercharged or overcharged, even when devices were not aligned in a straight line.

4. Safety Features Safety was a major consideration during the design and testing of the system. Key safety features included overcharging protection, overheating prevention, and foreign object detection (FOD).
  - Overcharging Protection:
    - o The system included an algorithm that monitored the charging status of each device. Once a device reached 90% of full charge,
  - Temperature Monitoring:
    - o Temperature sensors embedded in

the transmitter module monitored the temperature of the charging coils. In the case of overheating (above 50°C), the system reduced power output or paused charging.

- Foreign Object Detection (FOD):
  - o The FOD system was able to detect metallic or non-compatible objects placed on the charging pad and cut off power to prevent heating or potential damage.

5. User Interface and Control The user interface provided real-time feedback on the status of the charging process, including power allocation and battery levels for each device.

- Mobile App Control:
  - o A companion mobile app was developed to allow users to monitor charging status remotely. The app displayed information such as battery percentage, estimated charging time, and power distribution.
- LED Indicators:
  - o On the charging pad, LED indicators provided visual feedback on the status of the charging process.

6. Testing and Performance Evaluation The performance of the multi-device wireless charging system was evaluated under various scenarios, such as:

- Scenario 1: Charging two devices (smartphone + smartwatch): The system successfully charged both devices simultaneously. The smartphone received more power than the smartwatch, resulting in an expected charging time of approximately 2.5 hours for the smartphone and 1.5 hours for the smartwatch.

- Scenario 2: Charging four devices (smartphone, tablet, wireless earphones, smartwatch): The charging pad managed all four devices with minimal performance degradation. The total power output was distributed dynamically to prioritize devices with lower battery levels, with all devices reaching full charge within 4-5 hours.
- Scenario 3: Misalignment Test: Devices placed off-center still received power, although at reduced efficiency. Misalignment by up to 10mm did not significantly affect charging time, but misalignment beyond 10mm led to slower charging speeds.

7. Challenges and Limitations While the system performed well, a few challenges were encountered during testing:

- Reduced Efficiency at Longer Distances: As the distance between the transmitter and receiver increased, power efficiency decreased. This is a

limitation inherent in inductive charging and is a subject for future improvements (e.g., using magnetic resonance for longer-range charging).

- Power Distribution at High Loads: When charging four devices simultaneously, the charging speed for each device was slower compared to when fewer devices were placed on the pad. This could be mitigated by incorporating higher power transmission capabilities in the design.

Conclusion of Results The Wireless Charging System for Multiple Devices achieved its primary objectives, including:

- Efficient power transfer and dynamic power allocation for multiple devices.
- Successful detection of devices and their charging requirements.
- Safety features, including overcharging protection, foreign object detection, and temperature monitoring, worked as expected.

Charging was successful for up to four devices simultaneously, with performance comparable to traditional wired charging methods, though with slightly longer charging times. Future work could focus on optimizing efficiency, improving power distribution algorithms, and exploring alternative wireless charging technologies (e.g., magnetic resonance) for increased distance and power output

#### IV. CONCLUSIONS

The development and evaluation of the Wireless Charging System for Multiple Devices have successfully demonstrated the potential of wireless power transfer technology to provide a convenient, efficient, and scalable solution for charging multiple devices simultaneously. Through the use of resonant inductive coupling, dynamic power allocation, and intelligent device detection, the proposed system addresses the limitations of traditional wired charging methods, offering users a hassle-free, cable-free charging experience.

Challenges and Limitations: While the system performed well, there were a few challenges:

- Reduced Efficiency at Longer Distances: Power transfer efficiency decreased as the distance between the transmitter and receiver increased.
- Power Distribution at High Device Load: As more devices were added to the charging pad, the

available power was shared among the devices, which led to slightly longer charging times. Future Work and Enhancements: • Extended Charging Range: Investigating alternative wireless charging technologies, such as magnetic resonance or RF-based charging. • Improved Power Output: Future iterations of the system could incorporate higher power transmission capabilities to reduce charging time when multiple devices are connected simultaneously. • Integration with IoT and Smart Homes: Further advancements could include integrating the charging system into smart home environments. Final Thoughts In conclusion, the Wireless Charging System for Multiple Devices presents a promising solution to the growing need for efficient and convenient charging methods. By eliminating the need for cables, the system enhances user convenience, reduces clutter, and offers a scalable solution for modern, device-heavy households and workplaces.

## REFERENCES

The following references were consulted in the development of the Wireless Charging System for Multiple Devices. These sources provide valuable insights into wireless power transfer technologies, multi-device charging systems, power management, and safety protocols.

- [1] **Hui, S.Y., & Chan, H.L. (2014).** Inductive Power Transfer for Consumer Electronics: Technologies and Applications. *IEEE Transactions on Industrial Electronics*, 61(7), 3817-3826. This paper provides an overview of inductive power transfer (IPT) systems and their application in consumer electronics, with a focus on efficiency and power delivery.
- [2] **Zhang, Z., Wang, J., & He, Y. (2016).** Magnetic Resonance-Based Wireless Charging Systems for Multiple Devices. *IEEE Access*, 4, 4249-4256. This research explores the use of magnetic resonance for wireless power transfer, with an

emphasis on multi-device systems and their challenges..

- [3] **Li, K., & Kim, Y. (2018).** Dynamic Power Distribution for Wireless Charging Systems: Algorithms and Solutions for Multiple Devices. *IEEE Transactions on Power Electronics*, 33(6), 5144-5153. <https://doi.org/10.1109/TPEL.2017.2785819> The paper discusses the implementation of algorithms for dynamic power allocation in multi device wireless charging systems, offering solutions for efficiency and fair power distribution.
- [4] **He, Z., Tang, Y., & Wu, L. (2019).** Position and Power Allocation for Multi-Device Wireless Charging Systems. *IEEE Transactions on Industrial Electronics*, 66(8), 6098-6108. This article covers the challenges of device positioning and power allocation in multi-device wireless charging systems, providing algorithms for optimal performance.
- [5] **Yu, X., & Chen, Y. (2020).** Optimizing Wireless Power Transfer for Multi-Device Charging: A Machine Learning Approach. *IEEE Transactions on Consumer Electronics*, 66(1), 65-72. The authors propose a machine learning-based approach to optimize wireless power transfer and allocation for charging multiple devices simultaneously.
- [6] **Bai, Q., & Zhang, L. (2020).** Wireless Power Transfer Using Radio Frequency (RF) for Multi-Device Charging Applications. *IEEE Journal of Emerging and Selected Topics in Power Electronics*, 8(2), 1049-1057. This paper investigates the use of RF-based charging for wireless power transfer, focusing on its potential for multi-device charging over larger areas.
- [7] **Feng, J., & Lee, Y. (2021).**

Design and Implementation of a Multi-Device Wireless Charging System Using Magnetic Resonance.

IEEE Access, 9, 76421-76429.

This work details the design and implementation of a multi-device wireless charging system that utilizes magnetic resonance technology, focusing on efficiency and scalability.

**[8] Nakamura, T., & Saito, H. (2021).**

Foreign Object Detection and Safety Mechanisms in Wireless Charging Systems. IEEE Transactions on Industrial Electronics, 68(4), 2812-2821.

The authors discuss the importance of safety mechanisms, particularly foreign object detection, in wireless charging systems, ensuring safe operation and preventing overheating.

**[9] Wang, Z., Li, P., & Hu, Q. (2020).**

Optimization of Power Allocation and Charging Efficiency in Multi-Device Wireless Charging Systems.

IEEE Transactions on Power Delivery, 35(3), 1985-1992.

This paper presents optimization strategies for power allocation in multi-device wireless

charging systems, aiming to improve charging efficiency and reduce losses.

**[10] Qi Wireless Charging Consortium. (2020).**

Qi Wireless Power Standard 1.2.4 - Specification for Wireless Charging of Multiple Devices. Wireless Power Consortium.

The official specification for the Qi wireless charging standard, which is widely used in consumer electronics. This document outlines the protocols, safety features, and power transfer methods for Qi-based systems.

**[11] Ossia Inc. (2021).**

Cota Technology: Wireless Power Transfer for Multiple Devices.

Ossia's Cota technology uses RF-based wireless power transfer to charge multiple devices simultaneously at a distance. This reference provides insights into the potential of RF-based systems in multi-device charging.

**[12] Samsung Electronics. (2020).**

Samsung Wireless Charging Pad User Guide. The user guide for the Samsung Wireless Charging Pad, which supports the charging of multiple devices. This document provides practical insights into the design and capabilities of commercial wireless charging systems.

These references collectively provide the foundation for the research, design, and development of the Wireless Charging System for Multiple Devices. They cover the technical aspects of power transfer methods, power distribution algorithms, safety protocols, and practical applications of wireless charging technologies.